

# TruckMaster<sup>®</sup>

## Diesel Storage and Dispensing Solutions

### Product Guide

Available from 200 – 900 litres



# Portable Diesel Storage & Dispensing Solutions

Available from 200 – 900 litres

The TruckMaster range has been specifically designed for the safe transportation of diesel fuel. This robust, portable solution offers users the ultimate convenience by allowing them to refuel remotely on-site.

Available from 200 – 900 litres, with a number of specification and dispensing options, the Kingspan TruckMaster range suits a variety of applications including Agricultural, Construction and Forestry. Built from high-quality polyethylene all tanks are resistant to structural damage, changing weather conditions and UV radiation.

Specifically designed for refuelling remotely on-site, these portable tanks are approved


and tested to meet the needs of the European Agreement (ADR) for the international Carriage of Dangerous Goods by Road\*.

The TruckMaster range offers a quality, cost saving and compliant solution backed by excellent technical and customer service support.

## NEW Metal Hinge Technology

TruckMaster®

## Features and Benefits

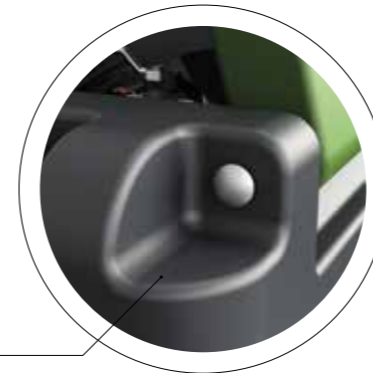

## Environmental Protection

With TruckMaster, on-site safety is assured as diesel can be transported without the requirement of heavy steel drums or jerry cans, which are liable to spill. All dispensing equipment is stored in a secure leak proof area, eliminating the risk of dripping fuel often encountered by an external retrofitted nozzle and hose.



## Easy to Lift

The portable tanks can be easily lifted with its specifically designed lifting eyes or by using a forklift.

## Efficient Transportation

The 430 and 900 litre models feature an internal baffle wall minimising the movement of liquid hence making the truck and the load more stable when in transit.



## Cost-saving Transportation

The compact 200 and 300 litre models occupy only half a Euro Pallet for more economical distribution and reduced delivery costs. 6 TM200 or 4 TM300 models can be stacked on one pallet.



## Power and Safeguard your Business

- > Over 40 years' experience  
Trust and reliability
- > 5 Year Guarantee\*\*  
Total peace of mind
- > Industry Leading  
ADR\* Approved
- > Quality Assured  
Certified to  
ISO 9001:2015,  
ISO 14001:2015,  
ISO 37301:2021 and  
ISO 45001:2018
- > Secure Lockable Lid  
All equipment is  
stored under the  
lockable lid\*\*\*

## TM430/300 Equipment Specification

1. Tank
2. 12V Pump
3. Automatic nozzle (with optional flowmeter, if required)
4. Pressure relief vent
5. Delivery hose
6. Lockable lid\*\*\*
7. Shackles†
8. 4" Inspection lid††
9. Filling offset†††
10. Internal LED Light†††
11. Gas Strut



## Model Selector

The dimensions and weights given are approximate. The differences result from the production technology and method of use of the product.

\* 200 and 300 litre models do not require ADR approval due to their smaller capacity

\*\* Two years on equipment. The warranty is subject to the product being used in accordance with the manufacturer's instructions.

\*\*\* Lid with integrated lock (TM200 low profile, TM430 and TM900). Lid with lockable latch, padlock not provided (TM200 and TM300)

† Available on TM430 and TM900 as optional extra

†† Available on TM200, TM300

††† Available on TM430 and TM900

TM200	
	
<b>Capacity (nominal)</b>	200 litres
<b>Length</b>	800 mm
<b>Width</b>	600 mm
<b>Height</b>	620 mm
<b>Weight</b>	33 kg

TM200 low profile	
	
<b>Capacity (nominal)</b>	200 litres
<b>Length</b>	1180 mm
<b>Width</b>	860 mm
<b>Height</b>	500 mm
<b>Weight</b>	52 kg

TM300	
	
<b>Capacity (nominal)</b>	300 litres
<b>Length</b>	800 mm
<b>Width</b>	600 mm
<b>Height</b>	890 mm
<b>Weight</b>	45 kg

TM430	
	
<b>Capacity (nominal)</b>	430 litres
<b>Length</b>	1180 mm
<b>Width</b>	860 mm
<b>Height</b>	910 mm
<b>Weight</b>	64 kg

TM900	
	
<b>Capacity (nominal)</b>	900 litres
<b>Length</b>	1410 mm
<b>Width</b>	1050 mm
<b>Height</b>	1210mm
<b>Weight</b>	97 kg

## Specification Options

## TruckMaster®

DESCRIPTION / CAPACITY	TM200	TM200 LOW PROFILE	TM300	TM430	TM900
Level gauge				•	•
Ball valve on suction line				•	•
Suction line with mesh filter	•	•	•	•	•
12 V DC pump (max. flow rate 50 l/min*)	•	•	•	•	•
6 m power cable with battery clamps	•	•	•	•	•
4 m flexible delivery hose		•		•	•
3,7 m flexible delivery hose	•		•		
Automatic nozzle	•	•	•	•	•
Lid with integrated lock		•		•	•
Lid with lockable latch (padlock not provided)	•		•		
Vacuum and pressure relief valve (VENT)	•	•	•	•	•
Lid with support gas struts				•	•
4 lifting shackles		○		•	•
Battery powered LED lamp		○		•	•
24 V DC pump (max. flow rate 50 l/min*)	○	○	○	○	○
12/24 DC pump (max. flow rate 70/35 l/min*)				○	○
12 V DC bipump (max. flow rate 85 l/min*)				○	○
230 V AC pump (max. flow rate 56 l/min*)				○	○
Digital flowmeter fixed to the nozzle	○	○	○	○	○
Digital flowmeter fixed to the pump				○	○

● Standard accessories ○ Optional accessories

\* The pump flowrates listed are the maximum flow rates across the pump as defined by the pump manufacturer. The actual flowrate in service will be lower. How much lower will depend on the equipment specification, how well the equipment is maintained, the quality of the media being pumped and the operating temperature.



Download  
the leaflet  
in electronic  
version

### European Office

**Kingspan Water & Energy Sp. z o.o.**  
ul. Topolowa 5,  
62-090 Rokietnica  
Poland  
T: +48 61 814 44 00  
E: zbiorniki@kingspan.pl

### Head Office

**Kingspan Water & Energy Ltd**  
180 Gilford Road, Portadown,  
Co. Armagh, BT63 5LF United  
Kingdom  
T: +44 (0) 28 3836 4444  
E: tankinfo@kingspan.com

We take every care to ensure that the information in this document is accurate at the point of publication. Specification may vary (within a small parameter) due to manufacturing process variations or environmental conditions. All images are for illustration purposes only and should not be taken as binding. The actual product may vary, and specification/dimensions/colour/other attributes may differ. To ensure you are viewing the most recent and accurate product information, please visit [kingspan.com](http://kingspan.com).

©Kingspan and the Lion Device are Registered Trademarks of the Kingspan Group plc in the UK, Ireland and other countries.

All rights reserved.  
Registered Office: 180 Gilford Road, Portadown, Co. Armagh, BT63 5LF. VAT GB412 5124 03. European Office: 5 Topolowa St., 62-090 Rokietnica, Poland. VAT PL779 20 57 260.